

Economical, in-line filter for:



MODEL
S1(718)-1

MODEL
S2(718)-1½

HYDRAULIC / LUBE / CUTTING MINERAL AND FUEL OILS

- **RENEW OIL**
Extend equipment and machinery life
Minimize oil disposal costs
- **ONE AND TWO CARTRIDGE MODELS**
Carbon steel with Buna-N gasket
- **OPERATING PRESSURE 75 PSI MAX.
OPERATING TEMPERATURE 240°F MAX**
- **SAFETY COVER PRESSURE RELIEF**
- **WALL MOUNT BRACKET INCLUDED**
Floor mounting legs optional
- **ACCEPTS 4" x 18" and 7" X 18" CARTRIDGES**
4" x 18" Maxi-Wind cotton and polypropylene
7" x 18" pleated paper, cotton, Fuller's earth

These models offer efficient full flow filtration of oil and other non-corrosive fluids. Both the single and double cartridge models include wall mount bracket and safety cover. Chamber is painted two-part epoxy gray enamel.

4" x 18" Maxi-Wind Cartridges (Bulletin M-109)

Unbleached cotton: 1, 3, 5, 10, 20, 30 micron for removal of particles from such liquids as oils, solvents and semi-aqueous cleaners.

Polypropylene: 1, 3, 5, 10, 20, 30 micron for removal of particles from liquids which require the filter media to exhibit a broader range of chemical compatibility.



7" x 18" Industrial Cartridges (Bulletin M-206)

Pleated paper: 1, 5, 10, 20, 30 micron for removal of particles from water and oil. Includes such applications as detergent, straight mineral and residual fuel oils; as well as water, glycol-water synthetics and oil-water emulsions.

Cotton: 10 micron for removal of particles from liquids such as hydraulic oil, fuel, quench and diesel engine lube oils; also machine tool coolants, solvents and other fluids.

Fuller's Earth: For removal of moisture, additives and corrosive products from oil. Ideal for use on fuel, hydraulic, insulating and lubricating oils as well as jet fuels, quench, rolling and synthetic hydraulic oils.

SERIES 718 STEEL FILTER CHAMBERS Specifications

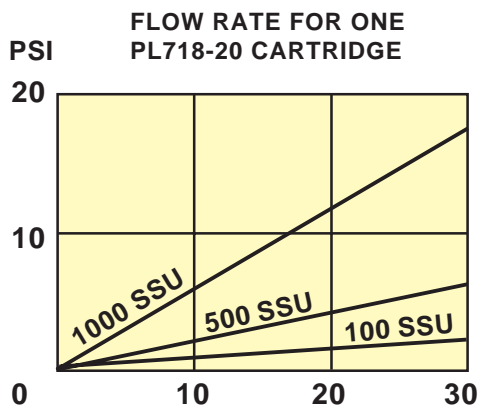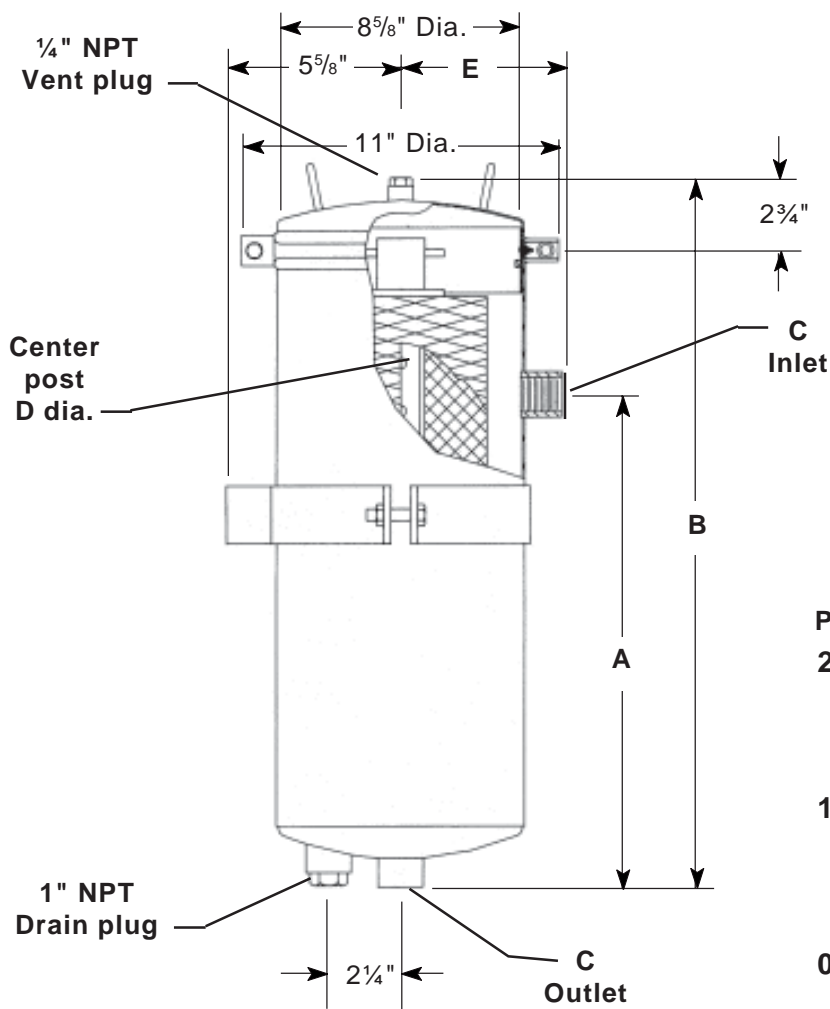

TO ORDER, use Price Code Number

| MODEL NUMBER | OIL VOLUME GALS. | MAX. FLOW GPM | INLET & OUTLET NPT | DIMENSIONS (inches) | | | | | SHIPPING WT. LBS. | PRICE CODE NUMBER |
|---------------------------------------|------------------|---------------|---------------------------------|---------------------|--------------------------------|-------------------------------|---------------------------------|--------------------------------|-------------------|-------------------|
| | | | | A | B | C | D | E | | |
| S1(718)-1 | 5 | 30 | 1" | 17 | 24 ³ / ₄ | 1 | 1 ⁵ / ₁₆ | 5 ⁵ / ₁₆ | 40 | 79-0901 1 |
| S2(718)-1 ¹ / ₂ | 9.5 | 60 | 1 ¹ / ₂ " | 35 | 42 ³ / ₄ | 1 ¹ / ₂ | 1 ¹¹ / ₁₆ | 5 ⁷ / ₈ | 60 | 79-0901 2 |
| ORDER FILTER CARTRIDGES SEPARATELY | | | | | | | | | | |
| OPTIONAL | | | | | | | | | | |
| COVER GASKET, VITON® | | | | | | | | | | 22-0626 1 |
| MOUNTING LEGS | | | | | | | | | | 78-0888 |

F.O.B. Northbrook, Illinois

Specifications subject to change without notice.

Registered trademark:
Viton - DuPont Dow Elastomers.



SERFILCO, LTD.

2900 MacArthur Blvd. 847-509-2900
Northbrook, IL 60062-2005 U.S.A. 800-323-5431
e-mail: sales@serfilco.com FAX: 847-559-1995
www.serfilco.com

DISTRIBUTED BY