



## SERIES 'HD' | FILTER CHAMBERS

***HARD DRIVES, PRINTED CIRCUIT BOARDS, MEMORY DISCS,  
SEMICONDUCTORS, ELECTROLESS NICKEL, ELECTROPLATING,  
ELECTRONIC MANUFACTURING, CHIPS & WAFERS***



### FEATURES

- High purity non-metallic solution contact — Precision CNC machined from premium grade PVDF or natural pure polypropylene
- Proven durability and ease of service
- Standard heavy duty flange connections for ease of installation and trouble-free operation
- Standard 0-60 PSI gauge, air vent valve and drain port
- For use with standard 10", 20", 30" or 40" single open end (SOE), 222 style filter cartridges
- Flow rates to 150 GPM

### BENEFITS


- Economical — Easy installation, operation and maintenance
- Efficient — High flow rate, low pressure drop saves energy
- Improves quality of finished product — Saves money, reduces scrap and rework
- SERFILCO — worldwide leader in service, dependability and design for over 35 years

### SPECIFICATIONS

**SERIES 'HD' Filter Chambers** are precision CNC machined from high purity PVDF or natural pure polypropylene. Chambers feature a swing bolt cover closure with 'T'-handles for ease of cartridge service — no tools are required. Precision machined covers feature FRP reinforcing plate to ensure positive liquid containment. Standard 0 - 60 PSI gauge guard, vent valve and drain port are designed to simplify operation and maintenance. Standard flange connections are 1½" with rugged 316 stainless steel back plates for ease of installation and to ensure leak-free operation. All external fasteners are 316 stainless steel; standard elastomers are EPDM. Chambers are designed for use with 4 - 10", 20", 30" or 40" single open end (SOE) style filter cartridges.



## DIMENSIONS

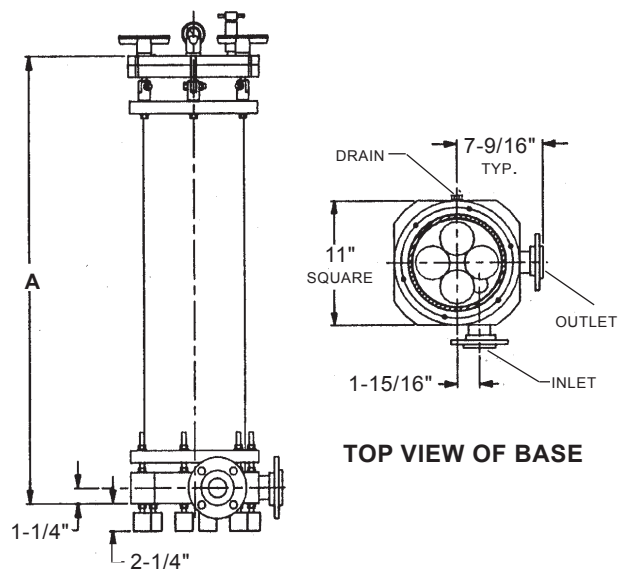

## FLOW RATE vs. PSI

70 GPM = 5 Δ PSI
125 GPM = 15 Δ PSI

## MAX. PSI PRESSURE @OPERATING TEMPERATURE

TEMPERATURE	PSI	
	Polypropylene	PVDF
80°F	58	90
100°F	51	76
120°F	45	65
140°F	39	55
160°F	30	47
180°F	Not recommended	40
200°F	Not recommended	34

## SPECIFICATIONS and ORDERING INFORMATION

MODEL	MATERIAL	CONNECTIONS	NO. of SOE CARTRIDGES	MAX. CART. LENGTH	*HEIGHT A SHIP.	WT. Lbs. TO	ORDER, USE PRICE CODE NO.
PPL40(1) SH 1½F	Polypropylene	1½" flange	4 - 10"	10 <sup>1</sup> / <sub>8</sub> "	16½"	35	78-1650-L
PPL80(2) SH 1½F			4 - 20"	20 <sup>1</sup> / <sub>8</sub> "	26½"	40	78-1651-L
PPL120(3) SH 1½F			4 - 30"	30 <sup>1</sup> / <sub>8</sub> "	36½"	45	78-1652-L
PPL160(4) SH 1½F			4 - 40"	40 <sup>1</sup> / <sub>8</sub> "	46½"	50	78-1653-L
KL40(1) SH 1½F	PVDF	1½" flange	4 - 10"	10 <sup>1</sup> / <sub>8</sub> "	16½"	55	78-1654-L
KL80(2) SH 1½F			4 - 20"	20 <sup>1</sup> / <sub>8</sub> "	26½"	65	78-1655-L
KL120(3) SH 1½F			4 - 30"	30 <sup>1</sup> / <sub>8</sub> "	36½"	75	78-1656-L
KL160(4) SH 1½F			4 - 40"	40 <sup>1</sup> / <sub>8</sub> "	46½"	85	78-1657-L

NOTE: For Viton® elastomers, change **L** to **V** in Model and Price Code No.

\* Cartridges Ordered Separately. Refer to Bulletin M-207-2 for SOE Cartridges.

Registered Trademark: Viton - DuPont Dow Elastomers