



SERIES 'TM-VT' VERTICAL TURBINE PUMPS




**MAGNETIC COUPLED, REGENERATIVE
VERTICAL TURBINE, HIGH HEAD, LOW
FLOW FOR:**

***PLATING / WET PROCESSING
ACIDS / CAUSTICS
CHEMICALS / FUME SCRUBBING***


- **Flows from 2 - 32 GPM or 150' TDH @ 60 Hz**
(10 - 100 LPM or 31.8m TDH @ 50 Hz)
- **Non-metallic solution contact**
Polypropylene / EPDM or PVDF / Viton® pumps
(See a chemical resistance chart)
- **Seal-less, leak-free magnetic coupled**
- **Sealed column and pump head — shaft, 'C' face
and motor bearing protected from fumes**
- **Rugged, precision machined from solid bar**
- **For use with standard NEMA or IEC 'C'-face
motors**

Designed for low flow, high head applications, Series 'TM-VT' vertical turbine pumps provide an extremely reliable and economical alternative to oversized centrifugal pumps operated near minimum flow with excessive bypass and power requirements. 'TM-


VT' non-metallic turbine designs exhibit excellent chemical resistance and low wearing characteristics. Also, because of their turbine design, Series 'TM-VT' pumps can be throttled to a required duty point without bypassing.




FUME SCRUBBING



**PCB WET
PROCESSING**





**OUT-OF-TANK
PUMPING and FILTRATION**



**SUMP DRAINING
and WASTE TREATMENT**

SERIES 'TM-VT' PUMPS Specifications and ordering information

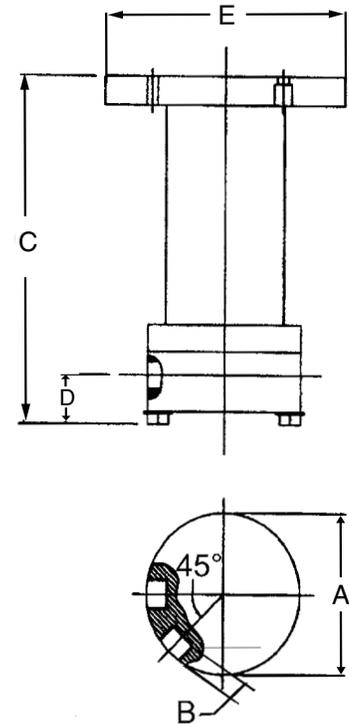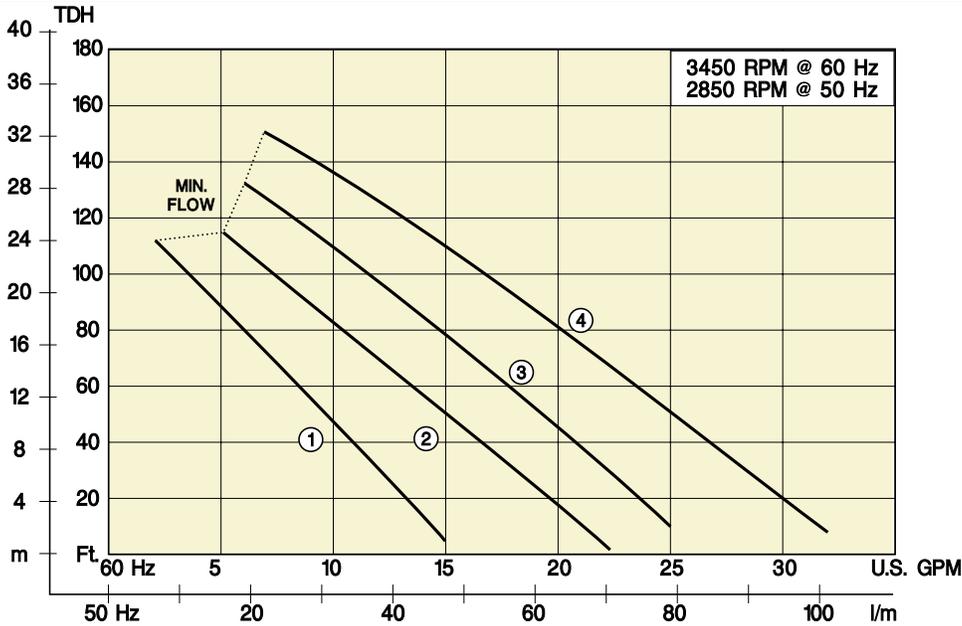

DIMENSIONS Inches						
MODEL	NEMA FRAME	A	B	C	D	E
TMVT33	56C	5.50	0.63	12.13	1.63	8.63
TMVT52	56C	5.50	0.63	12.13	1.63	8.63
TMVT53	143TC	6.25	0.75	12.63	1.88	8.63
TMVT72	143TC	6.25	0.75	12.63	1.88	8.63

NOTE: Motor dimensions may vary.

Series 'TM-VT' Polypropylene / EPDM: Polypropylene casing, column, impeller magnet enclosure and rear casing. Silica-free ceramic shaft and stationary bushing. Carbon filled PTFE rotating sleeve and bushing, EPDM 'O'-ring. (Maximum temperature 150°F, maximum pressure 110 PSI.) *To order, use Price Code No. below.*

FLOW CURVE	MIN. FLOW ¹		MAX. FLOW ¹		MAX. TDH ²		MAX. S. G. ³	HP	IMPELLER DIA.	CONNECTIONS SUCT. & DISCH.	MODEL NO.	PRICE CODE NUMBER	SHIPPING WT. (lbs.)
	GPM	LPM	GPM	LPM	ft	m							
1	3	9.4	15	47	110	23.3	1.3	1.0	2.17"	3/4" FNPT	TMVT33-2.17 D1.0	51-0140	56
2	5	16	22	69	112	23.7	1.2	1.5	2.52"	1" FNPT	TMVT52-2.52 D1.5	51-0141	58
3	6	19	25	79	135	28.6	1.2	2.0	2.91"	1" FNPT	TMVT53-2.91 D2.0	51-0142	65
4	7	22	32	100	150	31.8	1.2	3.0	2.91"	1" FNPT	TMVT72-2.91 D3.0	51-0143	68

Series 'TM-VT' PVDF / Viton: Same construction as polypropylene except PVDF casing, impeller magnet enclosure, rear casing and Viton 'O'-ring. (Maximum temperature 150°F, maximum pressure 110 PSI.)

To order PVDF / Viton pump, add -K to Model No. and Price Code No. above

TO ORDER —

EPDM, add -L to Model & PCN
 Viton, add -V to Model & PCN
 Motors are TEFC, 230 - 460V / 3 ϕ / 60 Hz.
 To order 115 - 230V / 1 ϕ / 60 Hz, change **D** to **C** in Model No. and add -1 to Price Code No.

Consult sales department for 50 Hz motors.

¹ GPM @ 60 Hz, LPM @ 50 Hz

² ft. TDH @ 60 Hz, m TDH @ 50 Hz

³ Motors are non-overloading at stated specific gravity.



SERFILCO

2900 MacArthur Blvd. 847-559-1777
 Northbrook, IL 60062-2005 U.S.A. 800-323-5431
 e-mail: sales@serfilco.com FAX: 847-559-1995
 www.serfilco.com